
Autoclavable in 2'x3'

(60 x 90 cm) size only

Dry the mat horizontally

and flat. Avoid bending.

## Polyurethane/Nitril Rubber

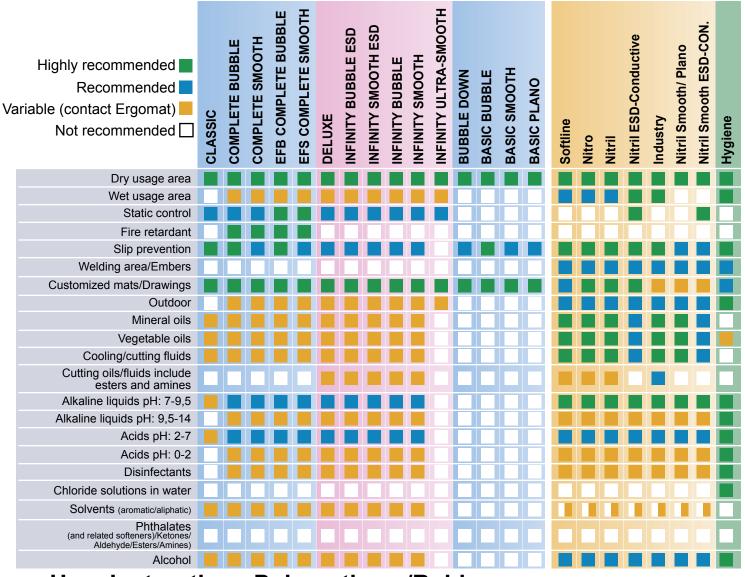

User instructions Polyurethane/Rupper				
	Classic/Complete Bubble/ Complete Smooth/Basic Bubble/Basic Smooth /EFB/EFS/ Bubble Down/ Basic Plano	Deluxe/Infinity Bubble/ Infinity Smooth	Softline/Nitro/Nitril/Nitril ESD/ Nitril CON/Nitril F/Industry/ Plano/Plano ESD/Plano CON	Hygiene/Safe Mat/ Super Safe-Mat
Suitable for usage	Dry areas	Dry areas	Dry and wet areas	Dry and wet areas
Temperature	40° to 95° F 5° to 35° C	40° to 95° F 5° to 35° C	-40° to 195° F -40° to 90° C	-40° to 250° F -40° to 120° C
Cleaning	<ul> <li>Sweeping</li> <li>Vacuuming</li> <li>Washing in mild soap (pH: 6-8) with subsequently careful wiping so all water is removed</li> </ul>	<ul> <li>Sweeping</li> <li>Vacuuming</li> <li>Washing in mild soap (pH: 2-9,5).</li> <li>If the backside of the mat gets wet during the washing, the mat must lie</li> </ul>	<ul> <li>Sweeping</li> <li>Vacuuming</li> <li>Wet mopping with mild soap (pH 5-9)</li> <li>Pressure washing 1,000 -1,500 PSI (70 - 100 BAR) at a minimum distance of 8"</li> </ul>	Sweeping     Vacuuming     Wet mopping water based cleaning agent (pH 1-13)     Pressure washing 1,000 - 1,500 PSI (70 - 100 BAR) at a minimum distance of 8"     Autoclevable in 2'v3"

Autoclavable in 2'x3' (60 x 90 cm)

size only. Dry the mat horizontally

and flat. Avoid bending.

upside down until it is dry

and all the moisture has

evaporated.