


The Ergomat Softline is made of pure Nitril rubber and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leave. This is the ultimate mat for extreme environments.

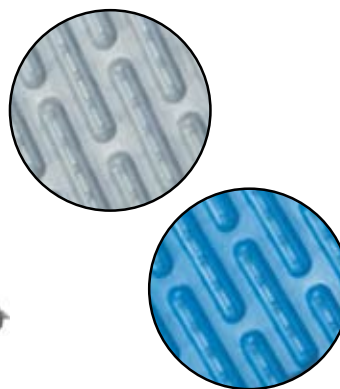

Unmatched Safety Features

- Molded beveled edges
 - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
 - No overlapping or worn-out connecting mats, also eliminating tripping hazards

Highest Quality

- Virgin raw material only
 - Unbeaten durability and ergonomic relief
- Silicone & latex-free
- Not only anti-fatigue, but also true ergonomic benefits
 - Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments stimulating the body to increase blood circulation and alertness that will reduce sick leave, workers' compensation and quality issues.

The Softline Advantage

- Chemical exposure will not affect the state of the mat; no curling up, swelling or expanding
 - No tripping hazards, maintains the ergonomic properties
- Meets USDA/CFIA standards
- Cross contamination risks are prevented
- Unique design allows for exceptional anti-slip properties and easy cleaning of metal chips
- Withstands sparks and welding chips up to 1112°F (600°C)
- Cleanroom ISO Class 5 (100)

Complies to USDA and CFIA standards/guidelines.

3-Year Warranty


All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

For a nominal additional charge, this mat can be supplied with yellow bevels, and/or holes for drainage and air flow.

ERGOMAT

www.ergomat.com
info@ergomat.com
 Tel. 877-374-6628
 Tel. 440-282-4651



ERGOMAT® Softline

| Properties | Standard | ERGOMAT Softline |
|--|------------------------------------|--|
| Material | | Nitrile |
| Color | | Black, Grey & Blue |
| Weight | | 4600 g +/- 50 g // 10 lbs +/- 1.75 oz |
| Length without beveled edges | | 89,5 cm +/- 1% // 35.5" +/- 1% |
| Width without beveled edges | | 60 cm +/- 1% // 23.6" +/- 1% |
| Thickness | | 15 mm // 0.62" |
| Density | ISO 2781 | 1370 kg/m ³ +/- 10 % |
| Hardness | ISO 868 | 50-60 Sh A |
| Friction | AVK Standard | 45 N |
| Abrasion Load = 5 N | ISO 46 49 (5N)N | 92 mm ³ // 3.6 in ³ |
| Elongation at break | ISO 37 | 790% |
| Breaking point / tensile strength | ISO 37 | 10,8 Mpa |
| Tearing strength | ISO 34 Method C | 28 N/mm |
| Electrical Resistance Surface point to point %50 RH | IEC-61340 4-1 / ESD STM7.1-2001 | >1 x 10 ¹⁰ Ω |
| Fire behavior | EN13501-1 DIN 4102-B1 Part 14/ | Not tested |
| Insulation Resistance | EN 60 335-1994 | 11 kV |
| Thermal Conductance | Table Value | 3,3 W/m/°C |
| Thermal properties Minimum use Maximum use Maximum short duration | The ergonomic properties remain | -40°C // -40°F 90°C // 194°F 600°C // 1112°F |
| Flame Point | Table Value | 400°C // 752°F |
| UV-resistance | | Inferior |
| Cleanroom application | EN ISO-14644-1 | ISO Class 5 (100) |
| Warranty | | 3 years |